



VHF AND UHF TRANSCEIVERS

IC-F520
(25W VHF transceiver)

IC-F521
(50W VHF transceiver)

IC-F620
(25W UHF transceiver)

IC-F621
(45W UHF transceiver)



BISS 1200
Compatible

256ch /
16 zones

2-Tone, 5-Tone
CTCSS, DTCS

50W (F521),
45W (F621) output

10-character
LCD display


Front panel
invertible

Optional voice
scrambler



Advanced Model



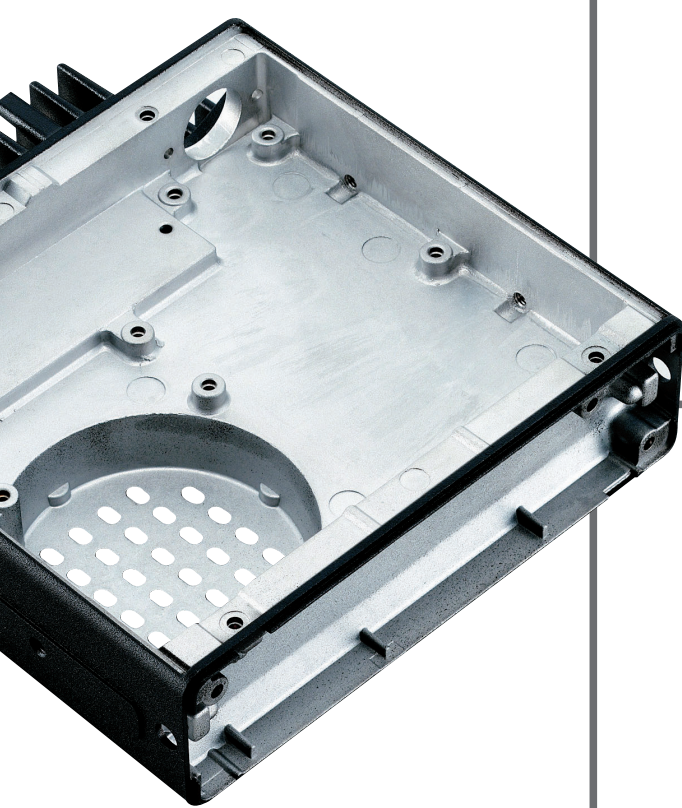

THE MOBILE OF TODAY'S PROF

The IC-F520/F620 series mobiles meet the demanding needs of today's professionals. With 256 channel capacity and built-in flexible tone signalings, cross-regional public safety coverage is a reality. Business and industrial users will appreciate the flexible, yet simple design of these MIL SPEC rugged mobiles — from conventional to expanded trunking operation.

Full built-in tone-signalings

All tone-signalings are built-in such as CTCSS, DTCS, 2-tone and 5-tone encode/decode and DTMF encode. A wide variety of selective calling systems are available to call specific station(s) or control a repeater. In addition, ANI (Automatic Number Identification) function is available with 2-tone/5-tone and DTMF decoder*.

* Optional UT-108 is required.

Face the speaker in the direction you need

Some people install their radios under the dashboard. Others, on the ceiling. Facing the speaker in the right direction is important for clear audio. The IC-F520/F620 series lets you simply rotate the chassis to face the speaker in the direction you need while the control head remains right side up.

MIL standard rugged construction

The tough aluminum die-cast chassis and polycarbonate front panel have been tested to the MIL standards. With this heavy-duty construction, the IC-F520/F620 series provides reliable operation over the long term, even with use in rugged vehicle environments.

256 memory channels

With 256 channels separated into 16 memory zones and identifiable by a 10-character alphanumeric LCD, you can quickly access pre-programmed contingency frequency plans — ideal for regional-wide, cross-municipality communications!

9 programmable buttons

2 pairs of up/down buttons and P0-P4 function assignable buttons allow you to customize functions to meet specific needs. The following items are programmable in conventional mode or SmartTrunk mode respectively.

- Channel down
- Scan start/stop A, B
- Scan add/delete (Tag)
- Priority rewrite A
- Memory channel 1-4
- High/Low output power
- C. Tone channel enter
- Wide/narrow channel
- DTMF autodial
- Emergency signal
- Emergency repeat
- User set mode
- Trunking group switch
- Turbo Speedial A-D
- Option out momentary 1-3
- Special function 1-2
- Channel up
- Bank
- Priority A, B
- Monitor
- Public Address
- Rx speaker
- Lock
- Talk around
- Re-dial
- Scrambler
- Compander
- Call
- Null
- #
- Option out 1-3
- Digital button

Wide/narrow channel programmable depending

Both wide and narrow (25/12.5kHz) channel bandwidth is programmable to each channel.

Independent AF volume knob

An independent volume knob offers simple, convenient operation. There is no need to take your eyes off the road to turn up the volume. Key backlighting is convenient for operation at night.



VHF TRANSCEIVER

IC-F520 25W

VHF TRANSCEIVER


IC-F521 50W

UHF TRANSCEIVER

IC-F620 25W

UHF TRANSCEIVER

IC-F621 45W

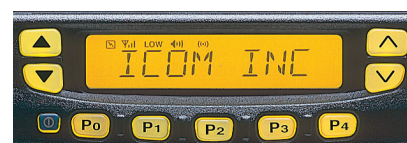

OF CHOICE FOR PROFESSIONAL



Higher power version

Higher power versions are also available for reliable long distance communications. (VHF : 50W, UHF : 45W)

Optional Voice Scrambler

Optional voice scrambler units UT-109 or UT-110 provide secure private communications.

Built-in audio compander

The built-in compander compresses the audio before the transmission and expands it at the receiver side. As a result, the signal to noise ratio improves to provide clear audio. This function is compatible with the IC-F33G series.

Stun and Power-on password function

The stun function disables a lost or stolen radio over the air, eliminating security threats from undesired listeners. The power-on password prevents unauthorized people turning on the radio.

BIIS 1200 compatible

The following selective calling and data message features are available with the BIIS version.

- 32 abbr. memories • 7 Group IDs
- 10-character SDM (Short Data Message)
- 24-status messages • RS-232C interface
- Position data transmission with a GPS

Other features

- Wide band coverage of up to 50MHz (Depending on version)
- PC programming capability
- 10 scanning lists and normal and priority scan
- Microphone hanger function for priority channel, monitor channel and scanning
- Optional DTMF mic (HM-152T)
- Horn drive connection with OPC-617
- Time-out-timer, Lock-out penalty timer and more

Avoid installation and/or use of the transceiver in direct sunlight.

Compatible with IC-F33G/F43G series handheld

The IC-F520/F620 series is designed to be a companion to our handheld transceiver, IC-F33G/F43G series. The number of channels and banks, signalling formats, audio compander, trunking capability and voice scrambler are completely compatible. Take advantage of the shared functionality to complete your communications requirements.



SPECIFICATIONS

GENERAL

- Frequency range :
IC-F520/F521 : 136–174MHz
IC-F620/F621 : 400–430MHz 440–490MHz
480–512MHz
- Number of Channels : Max. 256 Ch/ 16 zones
- Channel spacing : 12.5/25kHz, 15/30kHz
- Antenna impedance : 50Ω
- Frequency error : ±5.0ppm (VHF) ±2.5ppm (UHF)
- PLL channel step : 2.5kHz, 5 kHz and 6.25 kHz
- Power supply requirement : 13.6V DC
- Output power and current drain (approx) :

	IC-F520	IC-F521	IC-F620	IC-F621
Output power	25W	50W	25W	45W
Transmit High	7A	14A	7A	13A
Receive	AF max.	1200mA	1200mA	1200mA
	stand-by	300mA	300mA	300mA

- Operating temp. range : -30°C to +60°C; -22°F to +140°F
- Dimensions : 140(W)×40(H)×170(D) mm;
(projections not included) 5½(W)×1½(H)×6½(D) in
- Weight : 1.2kg; 2.6lb

TRANSMITTER

- Modulation system : Variable reactance frequency modulation
- Max. frequency deviation : ± 2.5kHz (narrow) ± 5kHz (wide)
- Modulation limiting : 70–100% (VHF) 60–100% (UHF)
- Audio harmonic distortion : 3% typ. (40% deviation)
- Spurious emissions : 70dB
- Adjacent channel power : 60dB (narrow) 70dB (wide)
- FM Hum and Noise : 40dB typ. (narrow) 46dB typ. (wide)
- External MIC impedance : 600Ω (8-pin modular)

RECEIVER

- Sensitivity : 0.25μV typ. (at 12 dB SINAD)
- Squelch sensitivity : 0.25μV typ. (at threshold)
- Adjacent channel selectivity : 65dB typ. (narrow) 75dB typ. (wide)
- Spurious response : 75dB
- Intermodulation : 75dB typ. (wide)
- Hum and noise ratio : 40dB typ. (narrow) 45dB typ. (wide)
- Audio output power : 4W typ. at 10% distortion with a 4Ω load
- External SP connector : 2-conductor 3.5 (d) mm (1/8"/4Ω)

Applicable U.S. Military Specifications

Icom makes rugged products that have been tested to and passed the following MIL-STD requirements and strict environmental standards.

Standard	MIL 810F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain	506.4	I, II
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Supplied Accessories

- Hand mic. (HM-152)
- DC power cable
- Mounting bracket kit
- Fuses
- Key assign stickers

Measurements made in accordance with EIA-152C/204D, TIA-603. All stated specifications are subject to change without notice or obligation.


OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



HM-152
DTMF MICROPHONE

SM-25
DESKTOP MICROPHONE

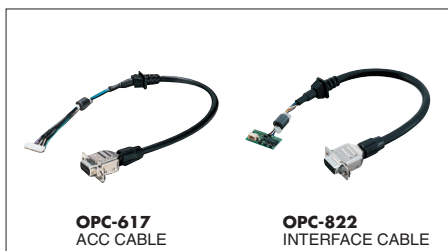

OPC-617
ACC CABLE

OPC-822
INTERFACE CABLE



EXTERNAL SPEAKERS

SP-10

SP-22

INTERNAL UNITS

UT-108
DTMF
DECODER

UT-109 (Ver. 02)
VOICE
SCRAMBLER
UNIT

UT-110 (Ver. 02)
VOICE
SCRAMBLER
UNIT



UT-108 : Provides DTMF decode and ANI capabilities.

UT-109 : Up to 32 scrambling codes are available.

(Ver. 02 required.)

UT-110 : Provides higher operating security. Up to 1020 (255 codes × 4 groups) scrambling codes are available. (Ver. 02 required.)

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0
Fax : +49 (6196) 76685-50
E-mail : info@icom-europe.com
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonn des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolaska@icompolaska.com.pl
URL : <http://www.icompolaska.com.pl>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Your local distributor/dealer: